



JettyDeck®

**Freedom of form, ease of use
and design in one**

Are you looking for something unique? **JettyDeck®** combines freedom of form and ease of use with elegant design. Where traditional substructures and superstructures are often made from the same materials, **JettyDeck®** brings together the best of both worlds: a robust metal substructure with a stylish finish in wood, EPDM, or EPDM FR 🔥. Ideal for use as a jetty, balcony floor, platform, or bridge deck.

- Endless possibilities in terms of shape, appearance and filling material
- High load capacity, long span possible and fully recyclable
- Maintenance-friendly and easy to replace filling material

STACO 

Create & Inspire

Productsheet Specials - **JettyDeck®**

JettyDeck®: flexible, durable and aesthetically responsible

The patented **JettyDeck®** panel is constructed from perforated profiles which are individually made to measure. Wooden elements or our EPDM variants are then applied to the profiles. Its weather-resistant character makes JettyDeck® perfectly suited for durable, aesthetic applications such as jetties, balcony floors, platforms, bridge decks and landings.

JettyDeck® can be easily adapted to its application; if wooden inlays are applied, the ribs protrude 2 mm above the walking surface to achieve an anti-slip effect. Staco also supplies stairs of the same configuration to complete the design.


The use of organic shapes can give a platform or an open (outdoor) space a special architectural character. We offer wood and EPDM as the standard filling, but we always invite our customers to suggest new filling materials – for a personal touch that suits their project.

For applications in multi-story residential buildings and other public spaces, a fire-retardant variant is even available: EPDM FR. This version meets stricter safety requirements without compromising on appearance or functionality.

Basic material specifications.

Basic material specifications

- Hot dip galvanised steel (3 mm) or Stainless steel (2 mm)
- Tolerance: +0/-4 mm for flatness and dimensions
- Tolerance: +8/-0 mm for cut-outs
- Structural welds every 500 mm or +/- 25 mm
- Maximum panel width 250 mm
- High load-bearing capacity
- Long span – up to 3 metres possible
- Easy to assemble, disassemble and re-use
- Durable, reusable and easy to maintain

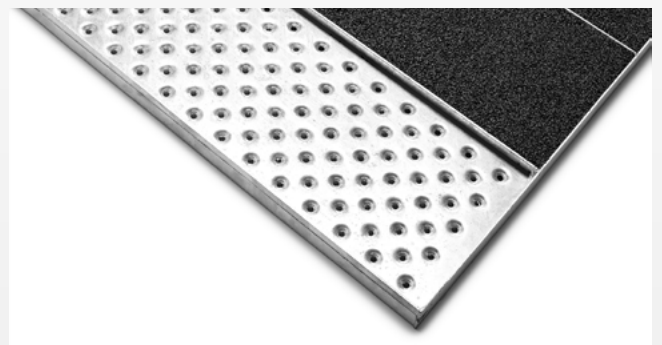




Freedom of form,
ease of use and
design **in one**

Our filling **variants**




JettyDeck® Wood

- Wood fill types: Bamboo, Bilinga or Cumaru hardwood
- Anti-slip class: Rutschklasse R10
- Jagged ribs possible with wooden inlay
- Long service life
- Refined look
- Recyclable
- Easy to change/replace filling

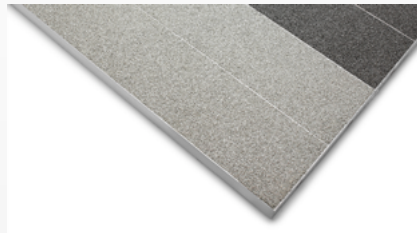

JettyDeck® EPDM

- EPDM filling available in various colours
- Anti-slip class EPDM: Comparable to Rutschklasse R13
- Minimum filling height required 10 mm for EPDM filling
- Water permeability of 7l/sec/m²
- Noise-reducing
- Long service life
- Recyclable
- Partial filling of grids or combinations of materials possible
- Temperature resistant from -25 to +80 degrees Celsius
- Replacement of the filling possible

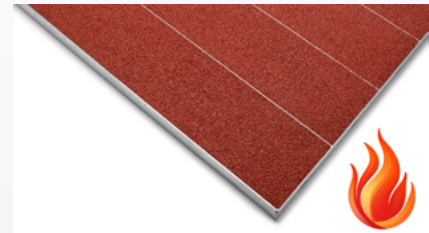

JettyDeck® EPDM FR

- EPDM FR filling available in various colours
- Anti-slip class EPDM: Comparable to Rutschklasse R13
- Minimum filling height required 10 mm for EPDM filling
- Water permeability of 7l/sec/m²
- Noise-reducing
- Long service life
- Recyclable
- Great fire-retardant properties
- Exceed stringent fire safety standards under EN 13501-1 classification
- Drainage holes (mesh size 6-8 mm)
- For floor applications classified as Bfl-s1
- For ceiling and wall applications classified as Bs1-d0
- Perfectly applicable in layered or multiple level residential buildings
- Replacement of the filling possible

STACO

Create & Inspire

The content of this brochure is intended as a guide only. No liability will be assumed for its content. All technical projects for platforms and traffic routes must be based on qualified strength calculations. All rights reserved including the right to reproduce this brochure or its parts without the specific written authorisation of Staco Holding B.V.

Staco Nederland B.V.

St. Jozefweg 68
5953 JP Reuver
T +31 (0)77 474 29 29
E info@stacoroosters.nl

Staco Belgium N.V.

Frankrijkstraat 11, K3-4
9140 Temse
T +32 (0)3 711 36 23
E info@staco.be

Staco Deutschland GmbH

Raderbroich 9
41352 Korschenbroich
T +49 2161 62172 0
E info@staco.de

Staco Gratings UK Ltd

Suite 9 Ashford House
Beaufort Court
Sir Thomas Longley Road
Rochester, Kent
ME2 4FA
T +44 (0)1634 72 33 72
E info@stacogratings.co.uk

Staco France (visiting address only)

ZI de la Gare
56460 Val d'Oust
T +33 (0)7 57 00 90 72
E info@staco.fr

Staco Polska Sp. z o.o.

ul. Fabryczna 8
32-005 Niepołomice
T +48 12 281 3505
E info@staco.pl



www.staco.eu